



机框/风叶: PBT塑料


耐压: 交流500V持续1分钟,漏电源小于5毫安

绝缘度: 在引线与机框之间直流500V电压时10兆欧

工作温度: -20°C~80°C

工作湿度: 20%~85%

使用寿命(25°C时): 滚珠轴承风扇5万小时, 含油轴承风扇为3万小时

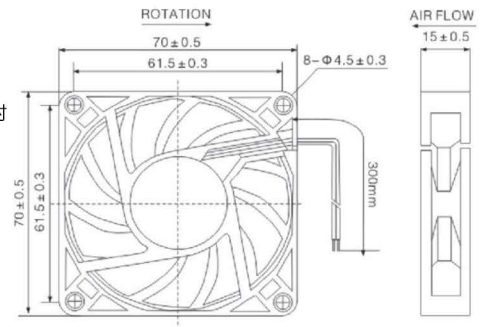

## Specification

| Model         | Bearing     | Rated voltage | Rated current | Rated input power | Nominal speed | Air flow |          | Air pressure |            | Noise | Weight |
|---------------|-------------|---------------|---------------|-------------------|---------------|----------|----------|--------------|------------|-------|--------|
|               |             | (V)           | (A)           | (W)               | (RPM)         | (CFM)    | (m³/min) | (mm/H₂O)     | (inch-H₂O) | (dBA) | (g)    |
| DF7015B(S)12H | sleeve/ball | 12            | 0.35          | 4.2               | 4200          | 33.52    | 0.94     | 3.33         | 0.13       | 40.0  | 45     |
| DF7015B(S)12M | sleeve/ball | 12            | 0.25          | 3                 | 3600          | 28.85    | 0.81     | 3.02         | 0.12       | 35.0  |        |
| DF7015B(S)12L | sleeve/ball | 12            | 0.16          | 1.92              | 3000          | 24.80    | 0.69     | 2.50         | 0.09       | 30.0  |        |
| DF7015B(S)24H | sleeve/ball | 24            | 0.25          | 6                 | 4200          | 33.52    | 0.94     | 3.33         | 0.13       | 40.0  |        |
| DF7015B(S)24M | sleeve/ball | 24            | 0.16          | 3.84              | 3600          | 28.85    | 0.81     | 3.02         | 0.12       | 35.0  |        |
| DF7015B(S)24L | sleeve/ball | 24            | 0.12          | 2.88              | 3000          | 24.80    | 0.69     | 2.50         | 0.09       | 30.0  |        |